

# HRV Heat Reclaim Ventilation



*VAM-FA Series*

*VKM-GM Series*



*VKM-G Series*





# Table of Contents

<b>INTRODUCTION</b>	4
<b>GENERAL HRV FEATURES</b>	6
Energy Efficiency	6
Design Flexibility	7
Clean Air	9
<b>VKM FEATURES</b>	10
Energy Efficiency	10
Design Flexibility	11
<b>LINE-UP</b>	12
<b>CONTROL SYSTEMS</b>	13
Individual Control Systems	13
Centralised Control Systems	16
<b>SPECIFICATIONS</b>	18
VAM-FA	18
VKM-GM	19
VKM-G	20
<b>OPTIONS</b>	21

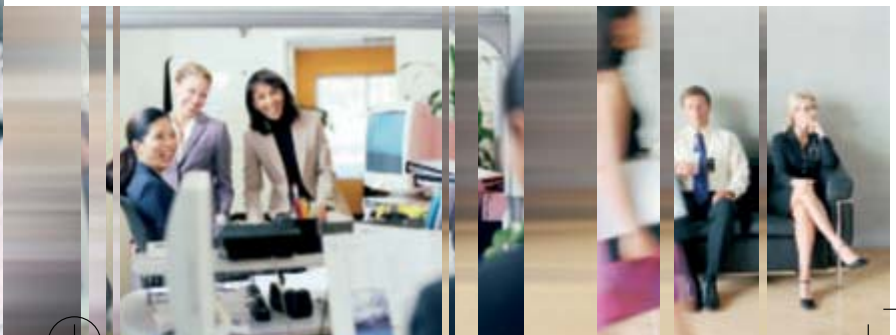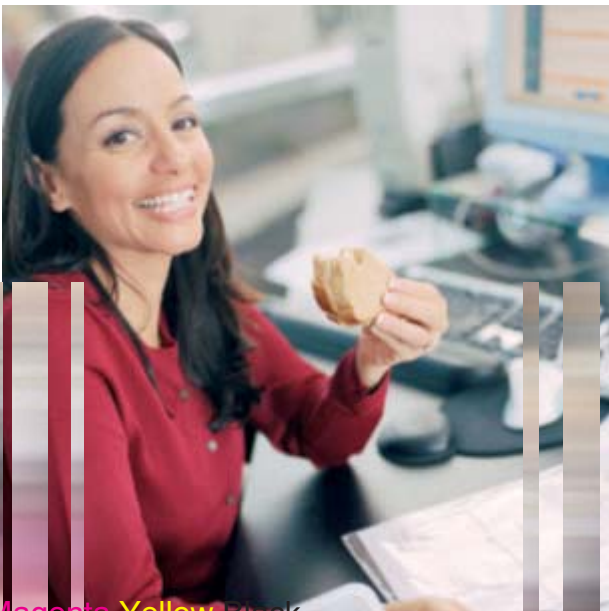



Daikin Europe N.V.

Daikin has a worldwide reputation based on over 70 years' experience in the successful manufacture of high quality air conditioning equipment for industrial, commercial and residential use.

In all of us,  
a green heart



## Environmental Consciousness

### Enhancing the present - safeguarding the future


Throughout the last 50 years or so the basic building blocks of life - air, water and the earth - have been systematically subjected to increasing levels of pollution with little regard to their potentially devastating effects on future generations.

Recently however, concern has grown regarding climate changes, acid rain, water and air pollution and the constant degradation of Earth's natural resources. The very technology that created these problems is now being harnessed to halt and reverse them. Depletion of the ozone layer and global warming have been highlighted and are now being addressed. Government legislation prohibiting the use of toxic substances and the generation of pollutants has slowed down the destruction of the environment.

Daikin Europe is proud to have been pro active in this respect, closely following its Japanese parent in implementing policies that have often pre-empted official legislative codes and directives. As a result, a culture of "environmental management" has since 2001, played a key role in the company's day to day activities and development strategies.

Top management commitment is reflected in the establishment of a number of action plans, which are now strictly observed and implemented throughout the Daikin Group.






**HRV helps create a high quality environment by interlocking with the air conditioning system**

The Daikin HRV (Heat Reclaim Ventilation) recovers heat energy lost through ventilation and holds down room temperature changes caused by ventilation, thereby maintaining a comfortable and clean environment. This also reduces the load on the air conditioning system and conserves energy.

In addition, the HRV interlocks with Daikin’s VRV system, Sky Air and other air conditioning systems and automatically switches over ventilation mode, further increasing the effects of energy conservation. HRV operation has been centralised on the air conditioner remote control allowing total control over air conditioning and ventilation via a simple configuration.

The current line-up includes models with DX coil and/or humidifier - the DX coil helps prevent the direct impact of cold airflow upon personnel during the heating cycle and vice versa. High static pressure enhances design flexibility.

**Components of Indoor Air Quality**

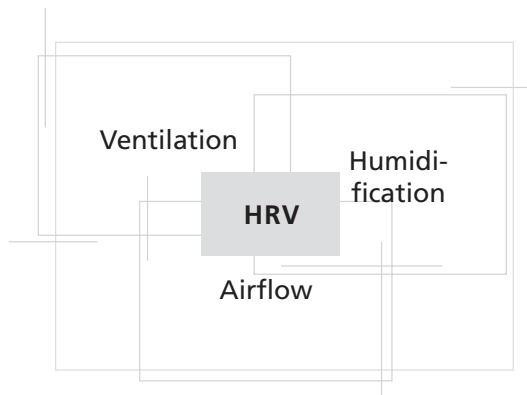

**New Features VKM unit**

- Humidifier
- DX coil
- High static pressure

**Line-up**

Air flow rate (m³/h)	150	250	350	500	650	800	1000	1500	2000
VAM-FA	X	X	X	X	X	X	X	X	X
VKM-GM: DX coil & humidifier				X		X	X		
VKM-G: DX coil				X		X	X		



## II. General HRV (VAM+VKM) Features

### 1 ENERGY EFFICIENCY

#### • Over 30 % Size Reduction

Use of the high efficiency paper (HEP) element and optimized design of the fan and airflow passages have resulted in matchless compactness without detriment to the 28% or so reduction in air conditioning load achieved by previous models. A reduction of up to 40mm in height allows the main unit to fit easily into limited spaces such as ceilings

On average 28 % air conditioning load reduction (maximum 40 %):

- 20% by operating in total heat exchange mode (in comparison with normal ventilation fans)
- a further 6 % by auto-ventilation mode changeover switching
- a further 2 % by pre-cool, pre-heat control (reduces air conditioning load by not running the HRV while air is still clean soon after the air conditioner is switched on.)

Note: the values mentioned above may vary according to weather and other environmental conditions at the location of the unit's installation


#### • Proprietary Developed HEP Element

The heat exchange element uses a high efficiency paper (HEP) possessing superior moisture absorption and humidifying properties.

The heat exchange unit speedily recovers heat contained in latent heat (vapour). The element is made of a material with flame resistant properties and is treated with an anti-moulding agent.




#### Operation of the heat exchanger element

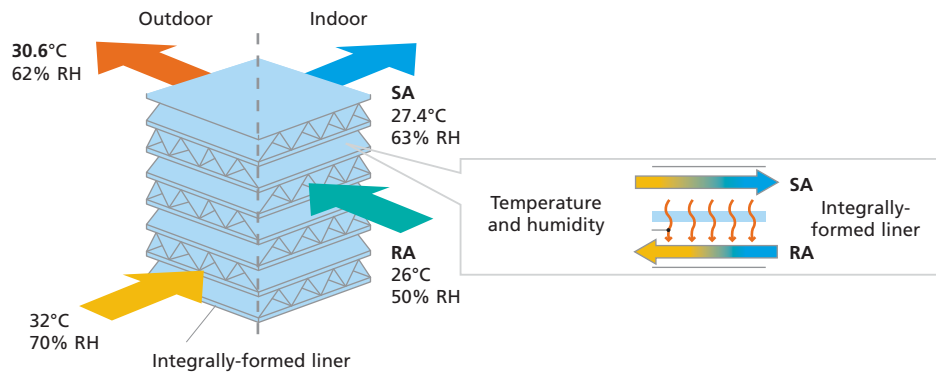



- Automatic Changeover to Efficient Operation Patterns**  
 Operation automatically switches to the optimum pattern to suit prevailing conditions

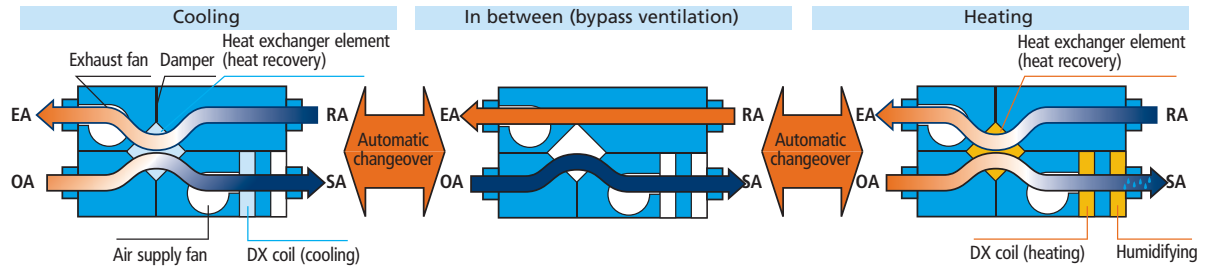


## 2 DESIGN FLEXIBILITY


- Outdoor Operation Temperature down to -15°C**  
 If the outdoor air suction temperature falls below -10°C, the unit switches to intermittent operation to prevent freezing of the heat exchanger element and dew condensation within the unit.  
 Intermittent operation = a thermistor (standard equipment) within the unit detects the outdoor air temperature. Unit operation varies according to the detected temperature.
- Slim Design**  
 The slim design of the HRV unit enables it to be mounted in narrow ceiling voids and irregularly shaped spaces.





- Installation under the floor of a small building



- Installation under a beam




- Installation in an irregular space

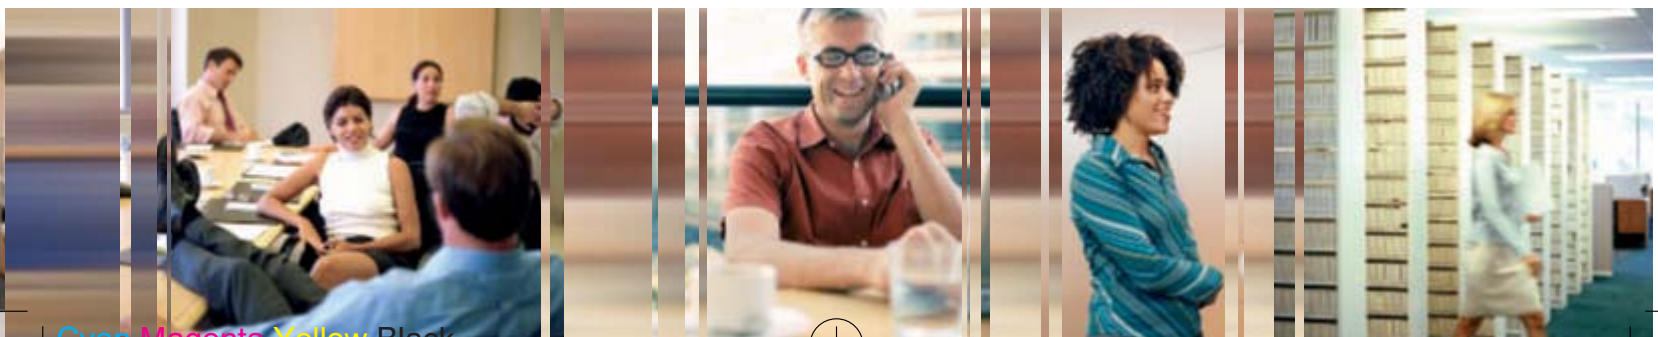

- **Simple Design and Construction**

The unit can be installed either horizontally or vertically in accordance with the conditions of the location.

A 450mm square inspection hatch enables maintenance and heat exchange element replacement to be performed with ease.

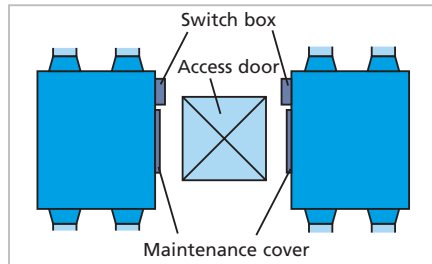

- **Quiet Operation**

Sound pressure levels are remarkable low at 20.5dB(A) (VAM150FA)

dB(A)	Perceived loudness	Sound
0	Threshold of hearing	-
20	Extremely soft	Rustling leaves
40	Very soft	Quiet room
60	Moderately loud	Normal conversation
80	Very loud	City traffic noise
100	Extremely loud	Symphonic orchestra
120	Threshold of feeling	Jet taking off

Daikin units






### 3 CLEAN AIR


- Fresh-Up Operation**

The user can select between 2 fresh-up modes via the remote control

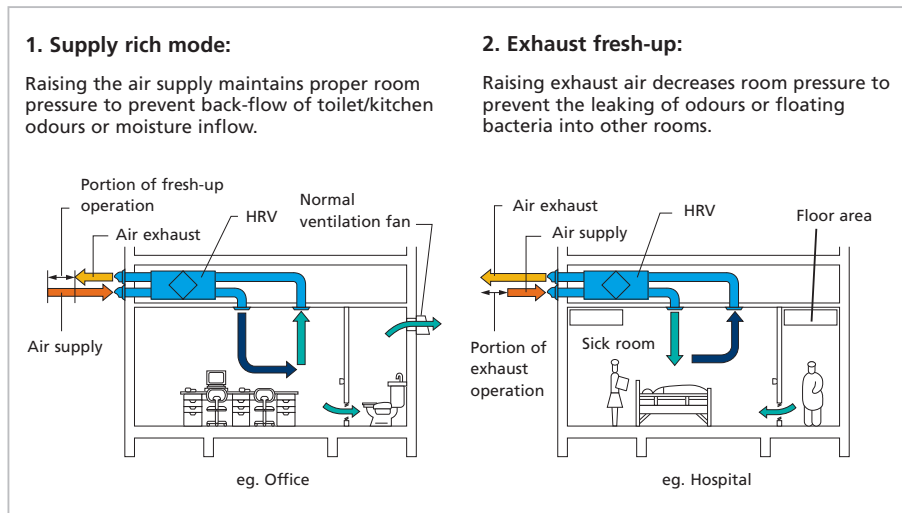

- Dust Prevention**

Prevents dust from falling thanks to directly mounted ducts

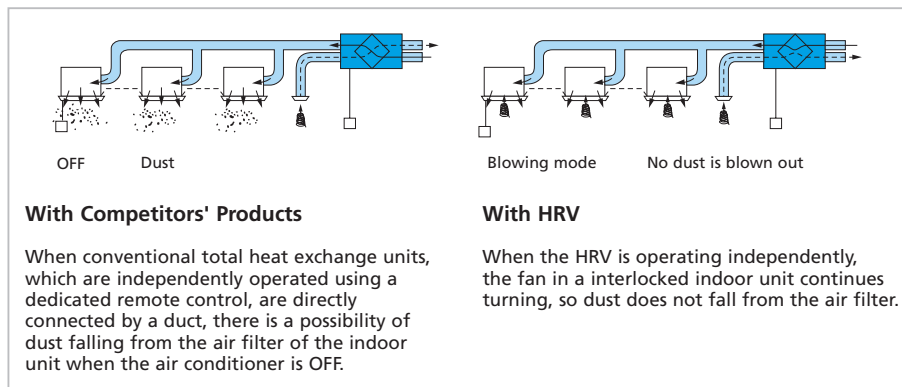


- Filter Cleaning**

A signal on the remote control indicates when the air filter needs cleaning




# III. VKM Features

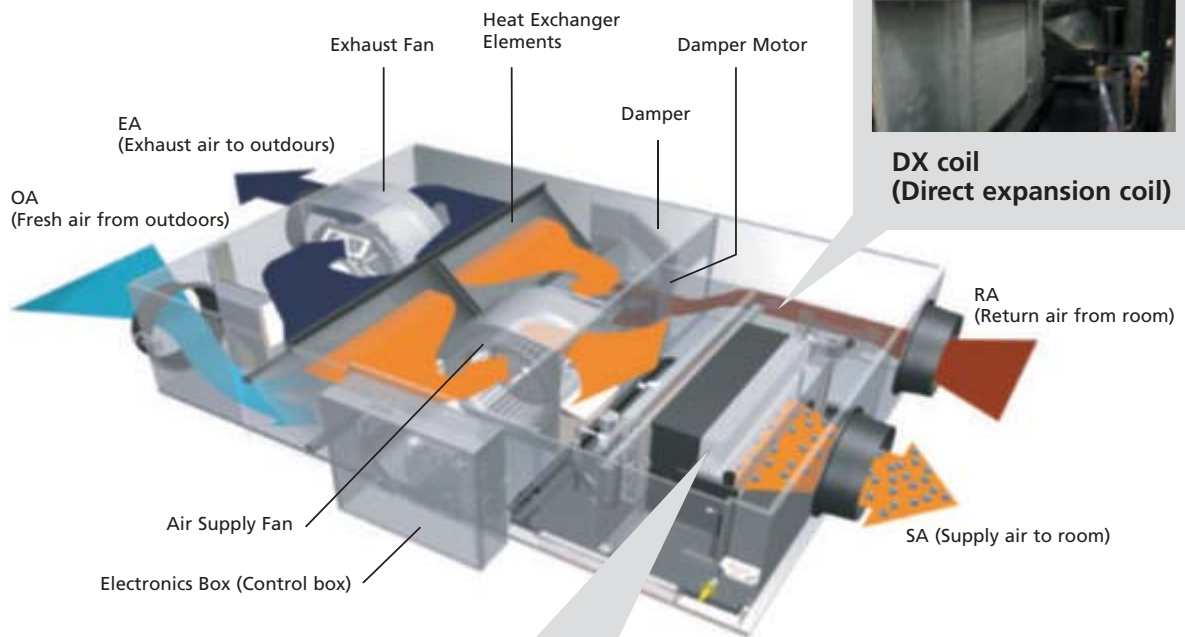

### Humidifier element:

Utilizing the principle of capillary action, water is permeated throughout the humidifier element. The heated air from the DX coil passes through the humidifier and absorbs the moisture

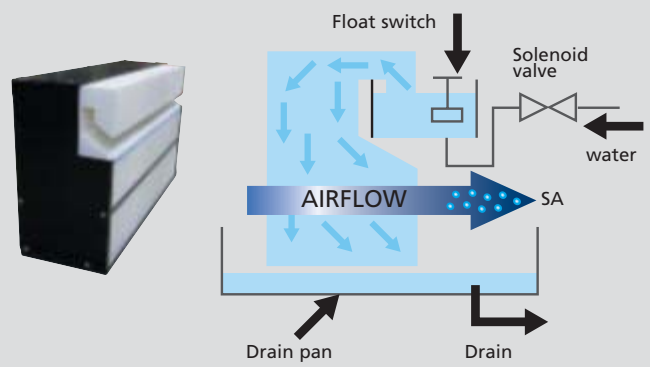


## 1 ENERGY EFFICIENCY


### • Night Purge Operation

Night purge is an energy conserving function operating at night when the air conditioning is switched off. By ventilating rooms containing office equipment that increases room temperature, night purge reduces the cooling load when air conditioning is switched on in the morning.

- Night purge cooling operation works only if connected to Multi or VRV systems.
- Night purge is factory set to "off" but can be activated by your Daikin dealer on request.

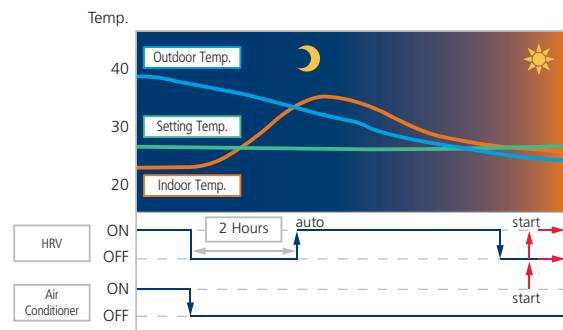


- Efficient Outdoor Air Introduction with Heat Exchanger and Cooling/Heating Operation**  
 Indoor unit with outdoor air treatment  
 The temperature can be brought close to room temperature with minimal cooling capacity through the use of outdoor air

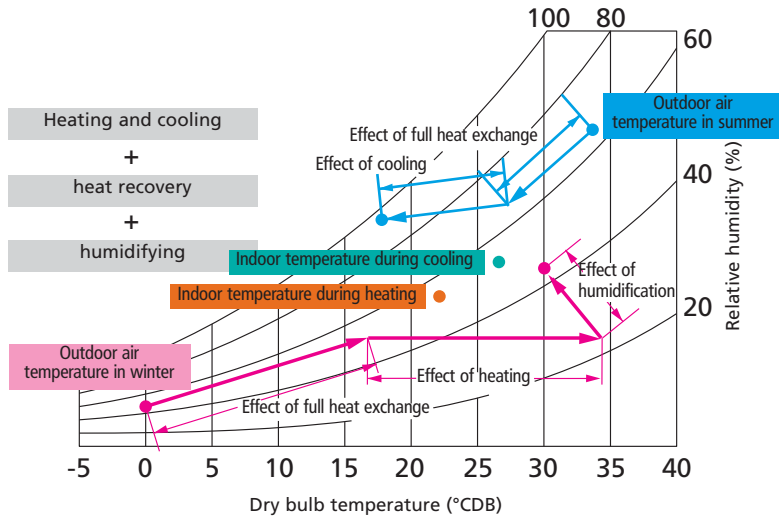

## 2 DESIGN FLEXIBILITY

- High Static Pressure**  
 Modifications to the fan, including the use of multiple arc blades, a thinner scroll and optimized fan scroll angle, help to boost efficiency. Dramatically higher static pressure is achieved due to improved fan performance. This reduces limitations on unit location and allows more flexibility in duct design.

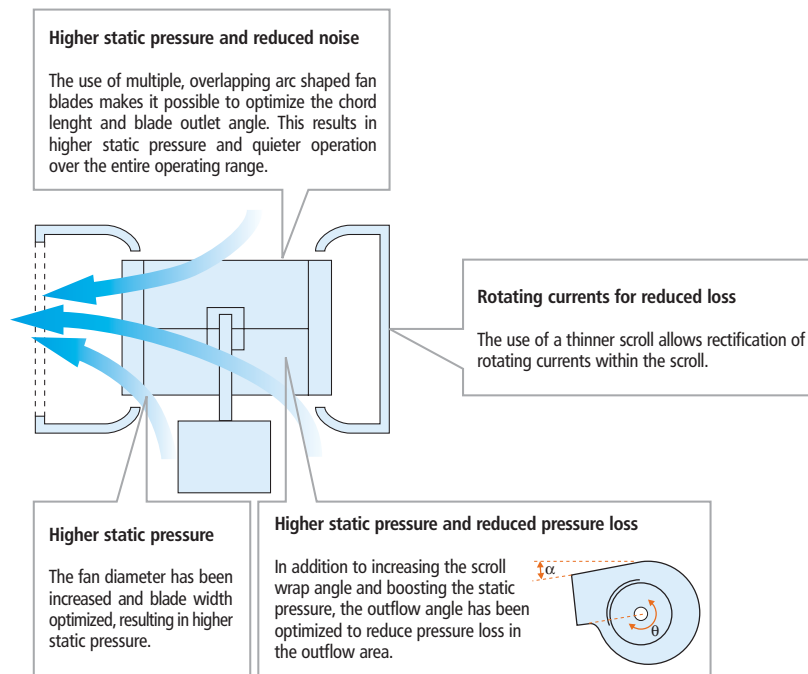

- Indoor Unit Connectability**  
 The indoor unit is connectable up to 130% of outdoor unit capacity

# IV. Line-up

## VAM-FA: ventilation



VAM 150FA7VE



VAM 250FA7VE



VAM 350FA7VE



VAM 500FA7VE



VAM 650FA7VE



VAM 800FA7VE



VAM 1000FA7VE



VAM 1500FA7VE



VAM 2000FA7VE

## VKM-GM: ventilation, DX coil and humidifier



VKM 50GMV1



VKM 80-100GMV1

## VKM-G: ventilation and DX coil



VKM 50GV1



VKM 80-100GV1



# V. Control Systems

HRV can also be connected to :

**DS-net**


**Intelligent Controller**

**Intelligent Manager**

**BACnet Gateway**

**BMS-IF**

Operation of the air conditioner using the remote control is interlocked with HRV operation, greatly simplifying overall system control. The same remote control centralizes air conditioning and ventilation operations, obviating any need for HRV remote control installation work. Using a centralized remote control also frees the user to choose from a wide range of control systems that integrate air conditioning and ventilation. By incorporating a variety of centralized control equipment, the user can build a large, high grade centralized control system.

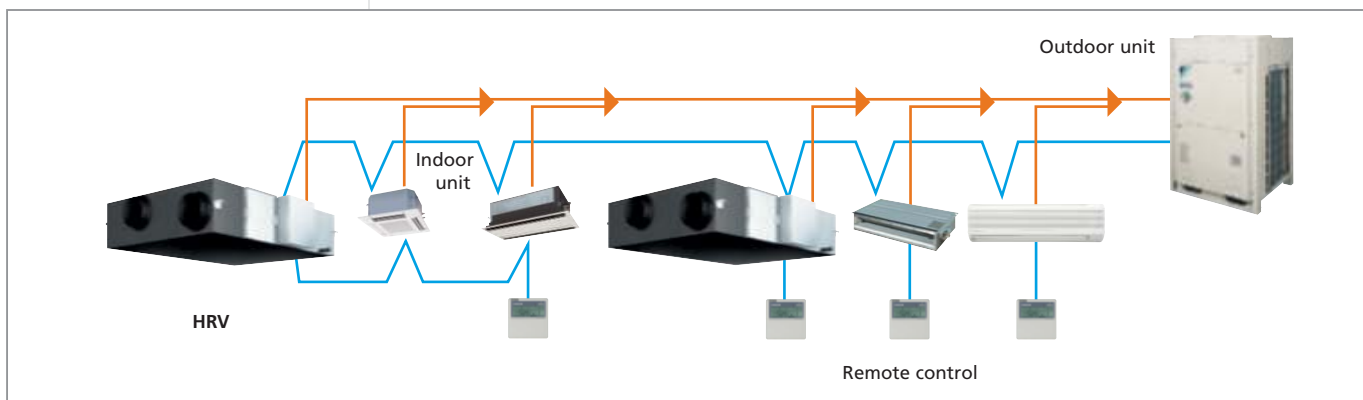

## BRC1D527



## BRC301B61



## 1 INDIVIDUAL CONTROL SYSTEMS


- Simultaneous ON/OFF of HRV and air conditioner (BRC1D527)
- ON/OFF of HRV (BRC301B61)
- Independent operation of HRV
- Airflow rate switching (initial setting)
- Ventilation mode switching (initial setting)
- Self diagnostic functions
- Filter sign display and reset
- Timer settings, simultaneous control with air conditioner (BRC1D527)
- Timer settings (BRC301B61)
- Fresh-up mode switching (Selectable: supply rich mode, exhaust rich mode; initial setting)



→ A variety of control systems can be controlled using only the BRC1D527

• **Group Control**


One air conditioner remote control simultaneously controls up to 16 air conditioning and HRV units.

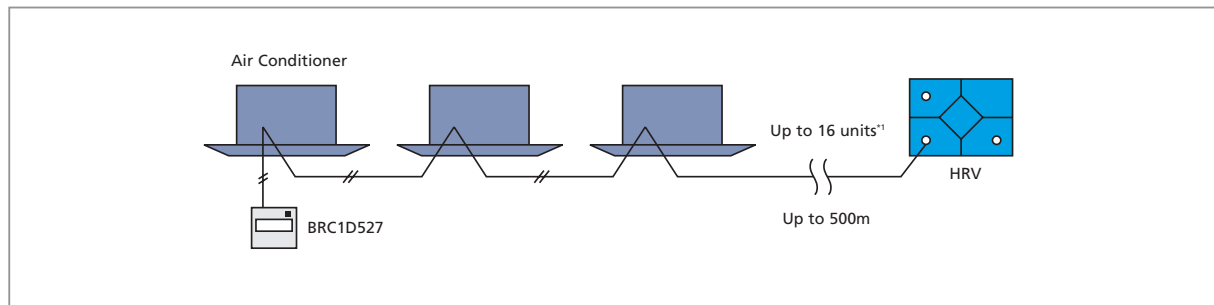

\*1: Count VKM unit as two air conditioners. For details, see Table 1 on page 13.


• **Control using 2 remote controls**





Allows control of air conditioning and HRV units from two locations by connecting two air conditioner remote controls. (group control is possible)

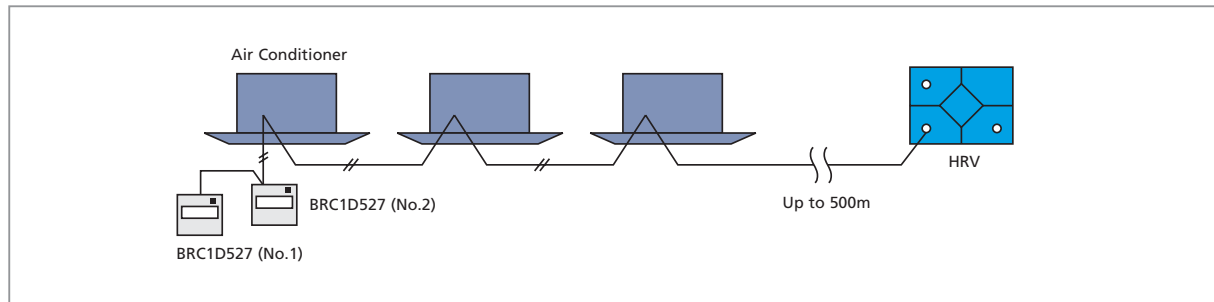

• **Long-distance Remote Control**

Remote operation control - from a distant control room for example, is possible thanks to wiring of up to 500 m. (2 remote control control possible)

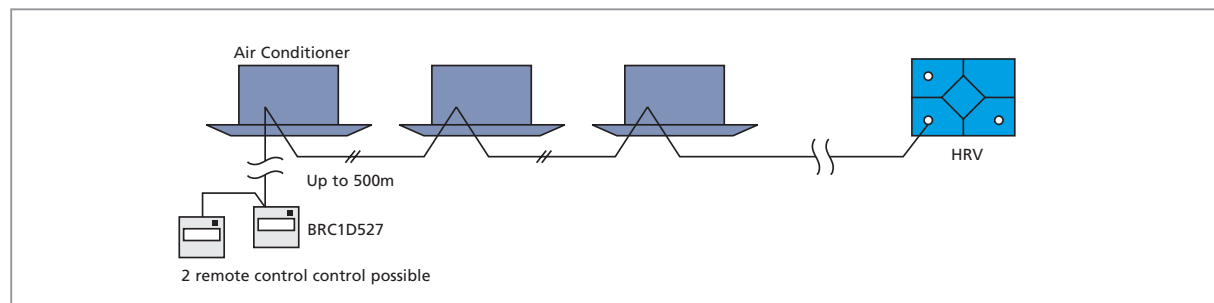

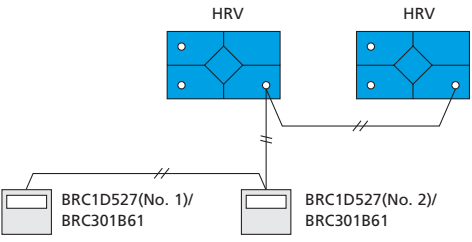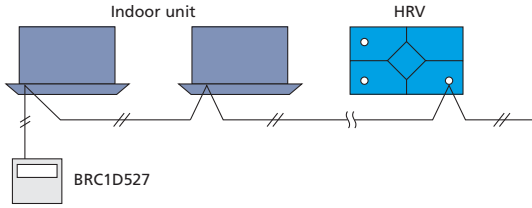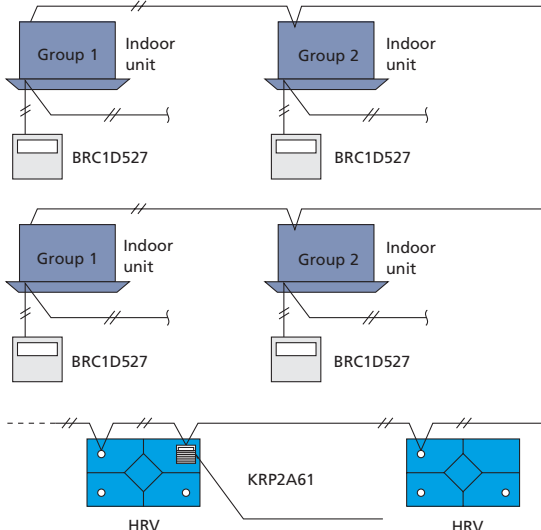		System construction	System characteristics	Necessary accessories																				
INDEPENDENT OPERATION SYSTEM	INDEPENDENT OPERATION		<ul style="list-style-type: none"> <li>Independent operation of HRV is possible</li> <li>Air conditioner remote control can be used</li> </ul>	BRC1D527 BRC301B61																				
	SIMULTANEOUS OPERATION OF MULTIPLE UNITS		<ul style="list-style-type: none"> <li>Operation is possible using 2 remote controls</li> <li>Multiple HRV units can be simultaneously controlled in batch. (Up to 8 HRV units can be connected)</li> </ul>	BRC1D527 BRC301B61																				
AIR CONDITIONING INTERLOCKED CONTROL (VRV, SKY AIR) SYSTEM	STANDARD SYSTEM	 <p>During group control operation, the VKM unit has a capacity equivalent to 2 standard indoor units. Up to 16 standard indoor units can be connected at the same time.</p> <p>Connectable indoor units:</p> <table border="1" data-bbox="555 1389 1084 1446"> <thead> <tr> <th>VKM</th> <th>0</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> <th>7</th> <th>8</th> </tr> </thead> <tbody> <tr> <td>Max. n° of VRV</td> <td>16</td> <td>14</td> <td>12</td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>2</td> <td>0</td> </tr> </tbody> </table> <p>Note: The VKM uses 2 remote control addresses per unit. The number of units that can be group controlled is shown above.</p>	VKM	0	1	2	3	4	5	6	7	8	Max. n° of VRV	16	14	12	10	8	6	4	2	0	<ul style="list-style-type: none"> <li>Multiple VRV indoor units or HRV units can be connected and controlled in batches, with interlocked operation of HRV and air conditioners by using the air conditioner remote control.</li> <li>The HRV unit can also be operated independently using the remote control for the indoor unit, even if the indoor unit is not in operation</li> </ul>	BRC1D527
	VKM	0	1	2	3	4	5	6	7	8														
Max. n° of VRV	16	14	12	10	8	6	4	2	0															
MULTIPLE GROUPS INTERLOCKED OPERATION SYSTEM		<ul style="list-style-type: none"> <li>Can control interlocked operation of VRV of multiple groups or Sky Air indoor units</li> <li>When one of the multiple groups operates, HRV units are interlocked and operate simultaneously</li> </ul>	BRC1D527																					

## 2 CENTRALISED CONTROL SYSTEMS

By combining the (optional) centralised control equipment listed below, the user can achieve a wide range of comprehensive centralised control systems for air conditioning and ventilation.

### DCS302C51



#### Centralised remote control - DCS302C51

- 64 groups (zones) of indoor units can be controlled individually by means of the LCD remote control.
- Max. 64 groups (128 indoor units) can be controlled
- Max. 128 groups (128 indoor units) can be controlled via 2 centralised remote controls, in separate locations.
- Zone control
- Malfunction code display
- Max. wiring length 1,000 m (total : 2,000 m)
- Combination with unified ON/OFF control, schedule timer and BMS system
- Airflow volume and direction can be controlled individually for indoor units in each group operation.
- Ventilation volume and mode can be controlled for Heat Reclaim Ventilation (VKM).
- Up to 4 'operation/stop' pairs can be set per day by connecting a schedule timer.

### DCS301B51



#### Unified ON/OFF control - DCS301B51

- One unit can turn ON/OFF up to 16 groups (128 units) of HRV and air conditioner units individually or in a batch.
- Lamps display operation and failure status of the connected HRV and air conditioner units.
- Up to 8 units can be linked to allow centralized control of up to 128 units.

### DST301B51



#### Schedule timer - DST301B51

- One unit can control the operation of up to 128 HRV and air conditioner units on a weekly schedule.
- Can set two ON/OFF operations per day for a period of one week.

#### Number of units that can be connected per system

Centralised remote control	2 units
Unified on/off control	8 units
Schedule timer	1 unit


AIR CONDITIONING INTERLOCKED CENTRALISED CONTROL SYSTEM

**System construction**

**System characteristics**

**Necessary accessories**

BATCH / INDIVIDUAL CONTROL SYSTEM

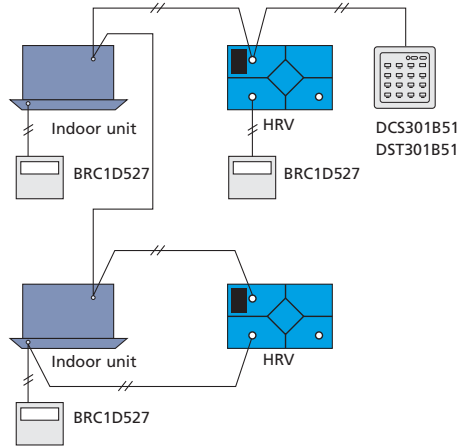

**Unified ON/OFF control - DCS301B51**

- One control can control the on/off operation of 16 groups of units collectively or individually
- Up to 8 controls can be installed in one centralised transmission line (in one system), which enables control of up to 128 groups. (16 groups x 8 = 128 groups)

**Schedule timer - DST301B51**


- One schedule timer can control the weekly schedule of up to 128 units

HRV remote control can set the individual operation of each HRV unit

Control system can be expanded depending on its purposes by combining a variety of centralised control equipment

DCS301B51  
or  
DST301B51,  
BRC1D527  
If necessary:  
DCS302C51

ZONE CONTROL SYSTEM

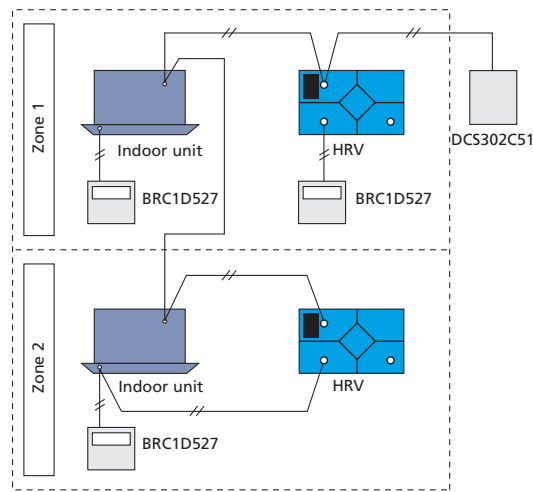


**Centralised remote control - DCS302C51**

- The centralised remote control provides settings and monitoring functions and can control up to 128 VRV and HRV units. A special adapter is required to connect Sky Air to the centralised line.
- Control is possible in 3 different patterns: individual, batch or zone
- Multiple groups can be controlled within the same zone
- Multiple HRV units can be operated independently
- System without air conditioning or HRV remote controls can be constructed
- Control system can be expanded depending on requirements by combining a variety of centralised control systems

DCS302C51,  
BRC1D527  
If necessary:  
DCS301B51,  
DST301B51

COMBINATION WITH OTHER TYPES OF AIR CONDITIONERS

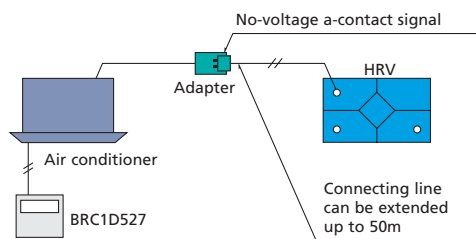

- Simultaneous operation of HRVs and air conditioners is possible via BRC1D527
- Use of the HRV remote control enables to change settings or operate HRVs independently

Connection adapter (no-voltage-a-contact-signal)

# VI. Specifications

## VAM-FA7



VAM800FA7VE

VAM-FA7VE		150	250	350	500	650	800	1000	1500	2000	
Temperature exchange efficiency (%)	ultra-high	74	72	75	74	74	74	75	75	75	
	high	74	72	75	74	74	74	75	75	75	
	low	79	77	80	77	77	76	76.5	78	78	
Enthalpy exchange efficiency (%)	for heating	ultra-high	64	64	65	62	63	65	66	66	66
		high	64	64	65	62	63	65	66	66	66
		low	69	68	70	67	66	67	68	68	70
	for cooling	ultra-high	58	58	61	58	58	60	61	61	61
		high	58	58	61	58	58	60	61	61	61
		low	64	62	67	63	63	62	63	64	66
Power Supply	VE	1 ~, 220~240V, 50Hz									
Sound pressure level dB(A)	Heat exchange mode	ultra-high	27-28.5	28-29	32-34	33-34.5	34.5-35.5	36-37	36-37	39.5-41.5	40-42.5
		high	26-27.5	26-27	31.5-33	31.5-33	33-34	34.5-36	35-36	38-39	38-41
		low	20.5-21.5	21-22	23.5-26	24.5-26.5	27-28	31-32	31-32	34-36	35-37
	Bypass mode	ultra-high	27-28.5	28-29	32-34	33.5-34.5	34.5-35.5	36-37	36-37	40.5-41.5	40-42.5
		high	26.5-27.5	27-28	31-32.5	32.5-33.5	34-35	34.5-36	35.5-36	38-39	38-41
		low	20.5-21.5	21-22	24.5-26.5	25.5-27.5	27-28.5	31-33	31-32	33.5-36	35-37
Casing	galvanised steel plate										
Insulation Material	self-extinguishable urethane foam										
Dimensions	HxWxD	mm	269 x 760 x 509		285 x 812 x 800		348 x 988 x 852		348x988x1140	710x1,498x852	710x1,498x1140
Weight		kg	24		33		48		61	132	158
Heat Exchange System	air to air cross flow total heat (sensible heat + latent heat) exchange										
Heat Exchange Element Material	specially processed non-flammable paper										
Air Filter	multidirectional fibrous fleeces										
Fan	Type	sirocco fan									
	Air Flow Rate (m³/h)	ultra-high	150	250	350	500	650	800	1,000	1,500	2,000
		high	150	250	350	500	650	800	1,000	1,500	2,000
		low	110	155	230	350	500	670	870	1,200	1,400
	External static pressure (Pa)	ultra-high	69	64	98	98	93	137	157	137	137
		high	39	39	70	54	39	98	98	98	78
		low	20	20	25	25	25	49	78	49	59
Motor Output	kW	0.030 x 2		0.090 x 2		0.140 x 2		0.230 x 2		0.230 x 4	
Connection Duct Diameter	mm	Ø 100	Ø 150		Ø 200		Ø 250		Ø 350		
Unit ambient condition	-15°C ~ +50°CDB, 80% RH or less										

- Notes:
- Air flow rate can be changed over to low mode or high mode.
  - Sound pressure level is measured at 1.5m below the center of the body.
  - Sound pressure level is measured in an anechoic chamber.  
Sound pressure levels generally become higher than this value depending on the operating conditions, reflected sound, and peripheral noise.
  - The sound pressure level at the air discharge port is about 8dB higher than the unit's sound level.
  - Even when the outdoor temperature is below -15°C, the system is operable down to -20°C with the preheater installed at the outdoor air intake side.





# VKM-GM



V K M 8 0 - 1 0 0 G M V 1

				VKM50GMV1	VKM80GMV1	VKM100GMV1	
DX coil capacity	Cooling		kW	4.71	7.46	9.12	
	Heating		kW	5.58	8.79	10.69	
Casing	Material			Galvanised steel plate			
Dimensions	Height		mm	387	387	387	
	Width		mm	1764	1764	1764	
	Depth		mm	832	1214	1214	
Weight				102	120.0	125.0	
Fan	Type			Sirocco fan			
	Air flow rate	Heat exchange mode	Ultra-high	m <sup>3</sup> /h	500	750	950
			High	m <sup>3</sup> /h	500	750	950
			Low	m <sup>3</sup> /h	440	640	820
		Bypass mode	Ultra-high	m <sup>3</sup> /h	500	750	950
			High	m <sup>3</sup> /h	500	750	950
			Low	m <sup>3</sup> /h	440	640	820
	External static pressure		Ultra-high	Pa	160	140	110
			High	Pa	120	90	70
			Low	Pa	100	70	60
Motor	Output		W	2 x 280	2 x 280	2 x 280	
Temperature exchange efficiency			Ultra-high	%	76	78	74
			High	%	76	78	74
			Low	%	77.5	79	76.5
Enthalpy exchange efficiency	Cooling	Ultra-high	%	64	66	62	
		High	%	64	66	62	
		Low	%	67	68	66	
	Heating	Ultra-high	%	67	71	65	
		High	%	67	71	65	
		Low	%	69	73	69	
Humidifier	System			Natural evaporating type			
	Amount		kg/h	2.7	4.0	5.4	
	Feed water pressure		MPa	0.02~0.49	0.02~0.49	0.02~0.49	
	N° of elements			1	1	2	
Operation range	Around unit			0°C~40°CDB, 80% RH or less			
	Outdoor air			-15°C~40°CDB, 80% RH or less			
	Return air			0°C~40°CDB, 80% RH or less			
Sound level - 230V	Heat exchange mode	Sound pressure	Ultra-high	dB(A)	37.5	39	39.5
			High	dB(A)	35.5	37	37.5
			Low	dB(A)	33	34	34.5
	Bypass mode	Sound pressure	Ultra-high	dB(A)	37.5	39	39.5
			High	dB(A)	35.5	37	37.5
			Low	dB(A)	33	34	34.5
Piping connection	Liquid	Type	flare connection				
		Diameter	mm	6.4	6.4	6.4	
	Gas	Type	flare connection				
		Diameter	mm	12.7	12.7	12.7	
	Water supply	mm		6.4	6.4	6.4	
Drain				PT3/4 external thread			
Insulation material				Self-extinguishable urethane foam			
Heat exchange system				Air to air cross flow total heat (sensible + latent heat) exchange			
Heat exchange element				Specially processed non-flammable paper			
Air filter				Multidirectional fibrous fleeces			
Connection duct diameter	mm		Ø 200	Ø 250	Ø 250		
Power supply	V1			1~, 50Hz, 220-240V			

- Notes:
- Indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB Indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB
  - Humidifying capacity is based on: Indoor temperature: 20°CDB, 15°CWB, outdoor temperature: 7°CDB, 6°CWB
  - Operation sound is measured at 1.5m below the center of the body.
  - Sound values are measured in an anechoic chamber built in accordance with JIS C 1502 condition. Operating sound level generally becomes higher than this value depending on the operating conditions, reflected sound, and peripheral noise.
  - The sound level at the air discharge port is about 8dB higher than the unit's operating sound.
  - For operation in a quiet room, it is required to take measures to lower the sound, for example install more than 2m soft duct near the air discharge grill.
  - Air flow rate can be changed over to Low mode or High mode.
  - Normal amplitude, input, efficiency depend on the other above conditions



# VKM-G




VKM80-100GV1

				VKM50GV1	VKM80GV1	VKM100GV1	
DX coil capacity	Cooling		kW	4.71	7.46	9.12	
	Heating		kW	5.58	8.79	10.69	
Casing	Material Galvanised steel plate						
Dimensions	Height		mm	387	387	387	
	Width		mm	1764	1764	1764	
	Depth		mm	832	1214	1214	
Weight				96.0	109.0	114.0	
Fan	Type			Sirocco fan			
	Air flow rate	Heat exchange mode	Ultra-high	m <sup>3</sup> /h	500	750	950
			High	m <sup>3</sup> /h	500	750	950
			Low	m <sup>3</sup> /h	440	640	820
		Bypass mode	Ultra-high	m <sup>3</sup> /h	500	750	950
			High	m <sup>3</sup> /h	500	750	950
			Low	m <sup>3</sup> /h	440	640	820
	External static pressure		Ultra-high	Pa	180	170	150
			High	Pa	150	120	100
			Low	Pa	110	80	70
Motor	Output		W	2 x 280	2 x 280	2 x 280	
Temperature exchange efficiency			Ultra-high	%	76	78	74
			High	%	76	78	74
			Low	%	77.5	79	76.5
Enthalpy exchange efficiency	Cooling	Ultra-high	%	64	66	62	
		High	%	64	66	62	
		Low	%	67	68	66	
	Heating	Ultra-high	%	67	71	65	
		High	%	67	71	65	
		Low	%	69	73	69	
Operation range	Around unit			0°C ~ 40°CDB, 80% RH or less			
	Outdoor air			-15°C ~ 40°CDB, 80% RH or less			
	Return air			0°C ~ 40°CDB, 80% RH or less			
Sound level - 230V	Heat exchange mode	Sound pressure	Ultra-high	dB(A)	38.5	41	40.5
			High	dB(A)	36.5	38	38.5
			Low	dB(A)	34.5	36	36
	Bypass mode	Sound pressure	Ultra-high	dB(A)	38.5	41	40.5
			High	dB(A)	36.5	38	38.5
			Low	dB(A)	34.5	36	36
Piping connection	Liquid	Type	flare connection				
		Diameter	mm	6.4	6.4	6.4	
	Gas	Type	flare connection				
		Diameter	mm	12.7	12.7	12.7	
Drain	PT3/4 external thread						
Insulation material	Self-extinguishable urethane foam						
Heat exchange system	Air to air cross flow total heat (sensible + latent heat) exchange						
Heat exchange element	Specially processed non-flammable paper						
Air filter	Multidirectional fibrous fleeces						
Connection duct diameter			mm	Ø 200	Ø 250	Ø 250	
Power supply				V1	1 ~, 50Hz, 220-240V		

Notes: • Cooling: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB

- Heating: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB
- Operation sound is measured at 1.5m below the center of the body.
- Sound values are measured in an anechoic chamber built in accordance with JIS C 1502 condition. Operating sound level generally becomes higher than this value depending on the operating conditions, reflected sound, and peripheral noise.
- The sound level at the air discharge port is about 8dB higher than the unit's operating sound.
- Air flow rate can be changed over to Low mode or High mode.
- Normal amplitude, input, efficiency depend on the other above conditions

# VII. Options

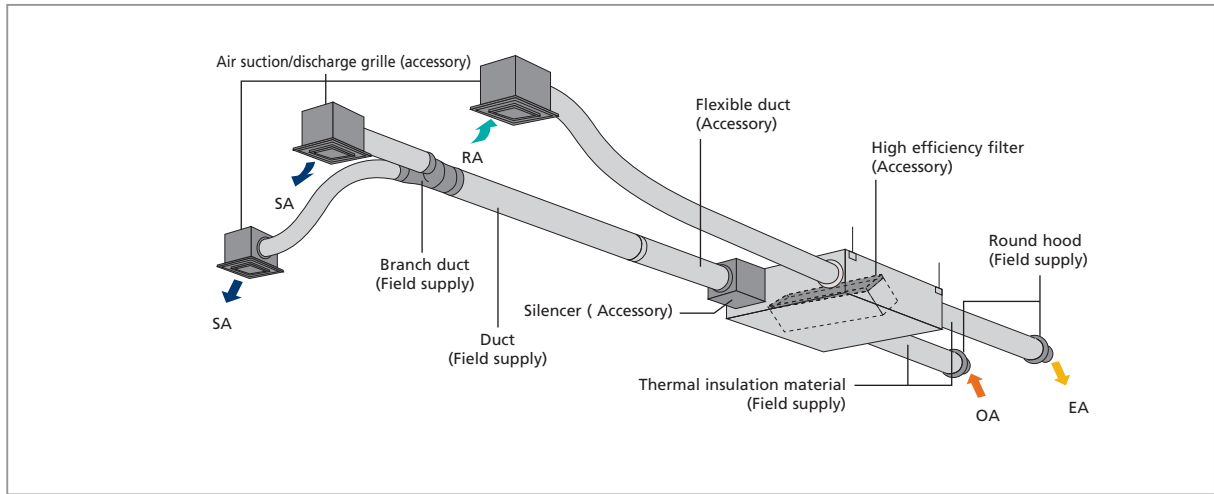


HRV remote control




Air conditioner remote control



Centralised remote control



Unified ON/OFF control




Schedule timer

Controlling device		VAM-FA / VKM-GM / VKM-G									
HRV remote control		BRC301B61*5									
Air conditioner remote control		BRC1D527									
Centralised remote control		DCS302C51									
Unified on/off control		DCS301B51									
Schedule timer		DST301B51									
PC board adapter	Wiring adapter for electrical appendices	KRP2A61									
	For humidifier (running ON signal output)	KRP50-2									
	For heater control kit	BRP4A50									
	For wiring	indoor unit	FXZQ	FXFQ	FXCQ	FXKQ	FXMQ	FXSQ	FXDQ-N	FXHQ	FXAQ
	Reference	KRP1B57*	KRP1B59*	KRP1B61*		KRP1D61		KRP1B56	KRP1B3	-	KRP1B61
	Installation box for adapter PCB	KRP1B101	KRP1D98	KRP1B96	-	-	KRP4A91	KRP1B101	KRP1C93	KRP4A93	-
		*4/*6	*2/*3	*2/*3			*5	*4/*6	*3	*2/*3	

- Notes :
1. Installation box is necessary for each adapter marked with \*
  2. Up to 2 adapters can be fixed per installation box
  3. Only 1 installation box can be installed per indoor unit
  4. Up to 2 installation boxes can be installed per indoor unit
  5. Necessary when operating HRV independently. When operating interlocked with other air conditioners, use the remote controls of the air conditioners


## 1 PC BOARD ADAPTER FOR HEATER CONTROL KIT - BRP4A50

When the installation of an electric heater is required in a cold region, this adapter with an internal timer function eliminates the complicated timer connecting work necessary with conventional heaters.

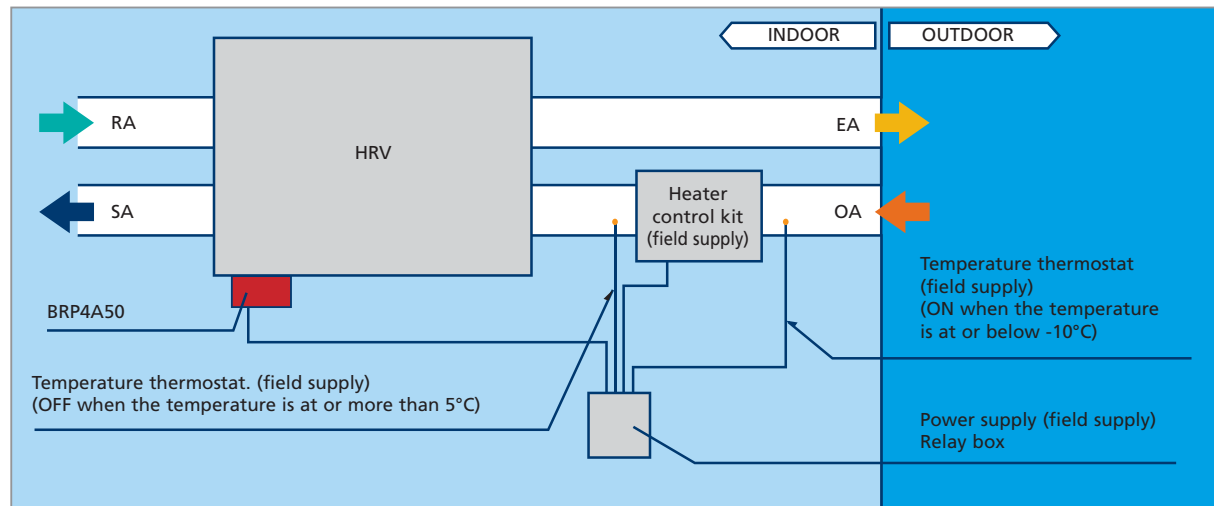

Notes when installing:

- Examine fully installation location and specification for using the electric heater based on the standards and regulations of each country.
- Supply the electric heater and safety production devices (such as a relay and a thermostat etc) which meet the on site standards and regulations of each country
- Use a non-flammable connecting duct to the electric heater. Be sure to allow 2m or more between the electric heater and HRV for safety.
- For the HRV units, use a different power supply from that of the electric heater and install a circuit breaker for each of them.

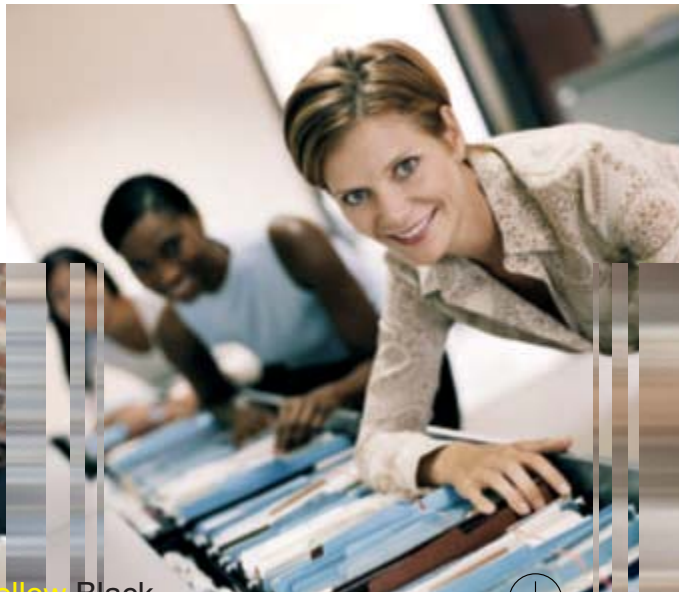



Silencer



Air suction/discharge grille  
(Noise suppression type)



Flexible duct  
(Noise suppression type)



Duct adapter

Description		VAM150FA7	VAM250FA7	VAM350FA7
Additional functions	Air suction discharge grille	Reference	K-DGL100A	K-DGL250B
		Colour	White	
		Nom. piping diameter	Ø 100mm	Ø 150mm
	High efficiency filter	YAFM323F15	YAFM323F25	YAFM323F35
Replacement for air filter		YAFF323F15	YAFF323F25	YAFF323F35
Flexible duct (1m)		K-FDS101C		K-FDS151C
Flexible duct (2m)		K-FDS102B		K-FDS152C

Description		VAM500FA7	VAM650FA7	VAM800FA7
Additional functions	Silencer	Reference	KDDM24A50	KDDM24A100
		Nom. piping diameter	Ø 200mm	Ø 250mm
	Air suction discharge grille	Reference	K-DGL200A	K-DGL250A
		Colour	White	
Replacement for air filter		Ø 200mm		Ø 250mm
High efficiency filter		YAFM323F50		YAFM323F65
Replacement for air filter		YAFF323F50		YAFF323F65
Flexible duct (1m)		K-FDS201C		K-FDS251C
Flexible duct (2m)		K-FDS202B		K-FDS252C

Description		VAM1000FA7	VAM1500FA7	VAM2000FA7
Additional functions	Silencer	Reference	KDDM24A100	K-DDM24A100 x 2
		Nom. piping diameter		Ø 250mm
	Air suction discharge grille	Reference		K-DGL250A
		Colour	White	
Replacement for air filter		Ø 250mm		
High efficiency filter		YAFM323F100	YAFM323F65	YAFM323F100 x 2
Replacement for air filter		YAFF323F100	YAFF323F65	YAFF323F100 x 2
Flexible duct (1m)			K-FDS251C	
Flexible duct (2m)			K-FDS252C	
Duct adapter	Reference	-		YDFA25A1
	Nom. piping diameter	-		Ø 250mm

Description		VKM50G(M)	VKM80G(M)	VKM100G(M)	
Additional functions	Silencer	Reference	-	K-DDM24B100	
		Nom. piping diameter	-	Ø 250mm	
	Air suction discharge grille	Reference	K-DGL200B		K-DGL250B
		Colour	White		
Replacement for air filter		Ø 250mm			
High efficiency filter		YAFF241G80M		YAFF241G100M	
Replacement for air filter		YAFF242G80M		YAFF242G100M	
Flexible duct (1m)		K-FDS201C		K-FDS251C	
Flexible duct (2m)		K-FDS202C		K-FDS252C	







Daikin Europe N.V. is approved by LRQA for its Quality Management System in accordance with the ISO9001 standard. ISO9001 pertains to quality assurance regarding design, development, manufacturing as well as to services related to the product.



ISO14001 assures an effective environmental management system in order to help protect human health and the environment from the potential impact of our activities, products and services and to assist in maintaining and improving the quality of the environment.

Specifications are subject to change without prior notice



Daikin units comply with the European regulations that guarantee the safety of the product.

VRV products are not within the scope of the Eurovent certification programme

Daikin products are distributed by:

**DAIKIN EUROPE N.V.**

Zandvoordestraat 300  
B-8400 Oostende, Belgium  
[www.daikineurope.com](http://www.daikineurope.com)

