

TECHNICAL SPECIFICATION


Light-type brass ball valves, full port, ISO 7:2000

BODY:	FORGED CW617N BRASS, SANDBLASTED AND CHROME-PLATED
BALL:	FORGED AND HARD CHROMED CW617N BRASS
THREADS:	ISO 7:2000
LEVERS:	UNI-EN 1706 EPOXY ENAMELLED ALUMINIUM HANDLE UNI-EN 10025 PVC-COATED STEEL HANDLE
BALL SEALS:	2 PTFE
SPINDLE:	CW614N BLOW OUT PROOF BRASS
SPINDLE SEALS:	2 O-RING NBR
TEMPERATURE RANGE:	-20°C +120°C
WORKING PRESSURE:	FROM PN 20 TO PN 40 BAR (ACCORDING TO THE TABLE) WOG 400 - WSP 125

КРАНЫ ШАРОВЫЕ СТАНДАРТНЫЕ, РЕЗЬБЫ ПО ISO 7:2000

ТЕХНИЧЕСКИЕ ДАННЫЕ

КОРПУС:	ЛАТУНЬ CW617N КОВАНАЯ, ПЕСКОСТРУЕННЫЙ, ХРОМИРОВАННЫЙ
ШАР:	ЛАТУНЬ CW617N КОВАНАЯ, ПОЛИРОВАННЫЙ, ХРОМИРОВАННЫЙ
РЕЗЬБА:	ISO 7:2000
ОРГАНЫ УПРАВЛЕНИЯ:	РЫЧАГ ИЛИ БАБОЧКА ИЗ АЛЮМИНИЯ UNI-EN 1706, ПОКРЫТИЕ-ЭПОКСИДНАЯ ЭМАЛЬ РЫЧАГ ИЗ СТАЛИ UNI-EN 10025, ПВХ ПОКРЫТИЕ
УПЛОТНЕНИЯ ШАРА:	2 КОЛЬЦА ИЗ ФТОРОПЛАСТА-4 (PTFE)
ШТОК:	ЛАТУНЬ CW614N (ВЗРЫВОБЕЗАПАСНОЕ ИСПОЛНЕНИЕ)
УПЛОТНЕНИЯ ШТОКА:	2 КОЛЬЦА ИЗ БНК (NBR)
ДИАПАЗОН ТЕМПЕРАТУР:	-20°C+120°C
РАБОЧЕЕ ДАВЛЕНИЕ:	ОТ 20 ДО 40 БАР, WOG 400- WSP 125

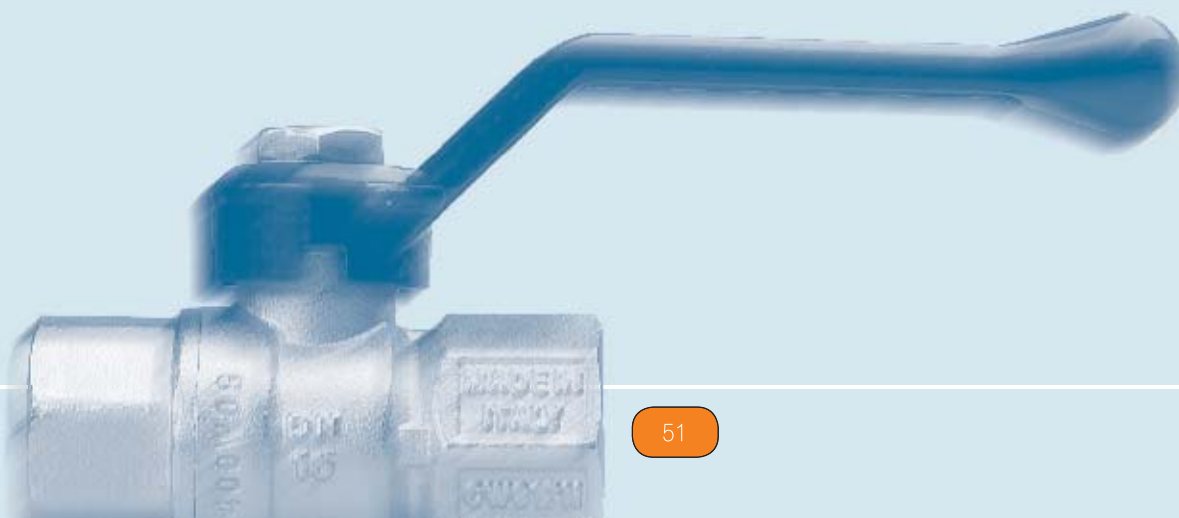

637
Female/female, aluminium handle
 Внутренняя/внутренняя, алюминиевый рычаг

NEW

COD.	MISURA/SIZE	DN	PN	BOX	CART.	€
063704	1/2"	15	40	20	80	
063706	3/4"	20	25	14	56	
063708	1"	25	25	10	40	
063710	1.1/4"	32	20	4	16	
063712	1.1/2"	40	20	3	12	
063716	2"	50	20	2	8	

636
Female/female, steel handle
 Внутренняя/внутренняя, стальной рычаг

NEW

ACS

COD.	MISURA/SIZE	DN	PN	BOX	CART.	€
063604	1/2"	15	40	24	96	
063606	3/4"	20	25	14	56	
063608	1"	25	25	10	40	
063610	1.1/4"	32	20	4	16	
063612	1.1/2"	40	20	3	12	
063616	2"	50	20	2	8	

638
Female/female, "T" handle
 Внутренняя/внутренняя, бабочка

NEW

COD.	MISURA/SIZE	DN	PN	BOX	CART.	€
063804	1/2"	15	40	24	96	
063806	3/4"	20	25	20	80	
063808	1"	25	25	10	40	
063810	1.1/4"	32	20	6	24	

657
Male/female, aluminium handle
 Наружная /внутренняя, алюминиевый рычаг

NEW

COD.	MISURA/SIZE	DN	PN	BOX	CART.	€
065704	1/2"	15	40	20	80	
065706	3/4"	20	25	14	56	
065708	1"	25	25	8	32	
065710	1.1/4"	32	20	4	16	
065712	1.1/2"	40	20	3	12	
065716	2"	50	20	2	8	

656
Male/female, steel handle
 Наружная /внутренняя, стальной рычаг

NEW

ACS

COD.	MISURA/SIZE	DN	PN	BOX	CART.	€
065604	1/2"	15	40	24	96	
065606	3/4"	20	25	14	56	
065608	1"	25	25	8	32	
065610	1.1/4"	32	20	4	16	
065612	1.1/2"	40	20	3	12	
065616	2"	50	20	2	8	

658
Male/female, "T" handle
 Наружная /внутренняя, бабочка

NEW

COD.	MISURA/SIZE	DN	PN	BOX	CART.	€
065804	1/2"	15	40	24	96	
065806	3/4"	20	25	20	80	
065808	1"	25	25	10	40	
065810	1.1/4"	32	20	4	16	

636DR
Female/female, CW602N-DR brass, steel handle
 Внутренняя/внутренняя, латунь cw602n-dr, стальной рычаг

NEW

DR

COD.	MISURA/SIZE	DN	PN	BOX	CART.	€
0636DR04	1/2"	15	40	24	96	
0636DR06	3/4"	20	25	14	56	
0636DR08	1"	25	25	10	40	
0636DR10	1.1/4"	32	20	4	16	
0636DR12	1.1/2"	40	20	3	12	
0636DR16	2"	50	20	2	8	

656DR
Male/female, CW602N-DR brass, steel handle
 Наружная /внутренняя, латунь cw602n-dr, стальной рычаг

NEW

DR

COD.	MISURA/SIZE	DN	PN	BOX	CART.	€
0656DR04	1/2"	15	40	24	96	
0656DR06	3/4"	20	25	14	56	
0656DR08	1"	25	25	8	32	
0656DR10	1.1/4"	32	20	4	16	
0656DR12	1.1/2"	40	20	3	12	
0656DR16	2"	50	20	2	8	

650

Handle extension for thermal isolation *
Удлинитель для ручки



COD.	MISURA/SIZE	DN	PN	BOX	CART.	€
065004	1/2"-3/4"			30	120	
065008	1"			15	60	
065010	1.1/4"-1.1/2"			10	40	
065016	2"			10	40	

* Suitable only for aluminium handle - Подходит только для алюминиевого рычага