

ARIZONA

СЕРИЯ 600

9

Brass ball valves, "light type" standard port, thread ISO 228/1

TECHNICAL SPECIFICATION

BODY:	BRASS CW617N FORGED, SANDBLASTED AND NICKEL-PLATED
BALL:	CW617N FORGED AND HARD CHROMED
THREADS:	ISO 228/1
LEVERS:	UNI-EN 1706 ALUMINIUM EPOXY ENAMELLED UNI-EN 10025 STEEL, PVC-COATED
BALL SEALS:	2 PTFE
SPINDLE:	BRASS CW614N (BLOW OUT PROOF)
SPINDLE SEALS:	1 PTFE + 1 O-RING NBR
TEMPERATURE RANGE:	-20°C +120°C
WORKING PRESSURE:	FROM PN 40 TO PN 20 BAR (ACCORDING TO THE TABLE) WOG 400 - WSP 125

Краны шаровые стандартные, резьбы по ISO 228/1

ТЕХНИЧЕСКИЕ ДАННЫЕ

КОРПУС:	ЛАТУНЬ CW617N КОВАНАЯ, ПЕСКОСТРУЕННЫЙ, НИКЕЛЕРОВАННЫЙ
ШАР:	ЛАТУНЬ CW617N КОВАНАЯ, ПОЛИРОВАННЫЙ, ХРОМИРОВАННЫЙ
РЕЗЬБЫ:	ISO 228/1
ОРГАНЫ УПРАВЛЕНИЯ:	РЫЧАГ ИЛИ БАБОЧКА ИЗ АЛЮМИНИЯ UNI-EN 1706, ПОКРЫТИЕ -ЭПОКСИДНАЯ ЭМАЛЬ РЫЧАГ ИЗ СТАЛИ UNI-EN 10025, ПВХ ПОКРЫТИЕ
УПЛОТНЕНИЯ ШАРА:	2 СЕДЛА ИЗ ФТОРОПЛАСТА-4 (PTFE)
ШТОК:	ЛАТУНЬ CW614N (ВЗРЫВОБЕЗАПАСНОЕ ИСПОЛНЕНИЕ)
УПЛОТНЕНИЯ ШТОКА:	1 ИЗ ФТОРОПЛАСТА-4 (PTFE)+ 1 КОЛЬЦО ИЗ БНК (NBR)
ДИАПАЗОН ТЕМПЕРАТУР:	-20°C +120°C
РАБОЧЕЕ ДАВЛЕНИЕ:	ОТ 20 ДО 40 БАР (СОГЛАСНО ТАБЛИЦЕ) WOG 400 - WSP 125



600
Female/female, aluminium handle
 Внутренняя/внутренняя резьба, алюминиевый рычаг


ACS

КОД COD.	РАЗМ. MISURA/SIZE	ДУ DN	НД PN	КОРОБ. BOX	КАРТ.ЯЩИК CART.	€
060004	1/2"	15	40	24	96	
060006	3/4"	20	25	14	56	
060008	1"	25	25	10	40	
060010	1.1/4"	32	20	4	16	
060012	1.1/2"	40	20	3	12	
060016	2"	50	20	2	8	

601
Female/female, steel handle
 Внутренняя/внутренняя резьба, стальной рычаг


КОД COD.	РАЗМ. MISURA/SIZE	ДУ DN	НД PN	КОРОБ. BOX	КАРТ.ЯЩИК CART.	€
060104	1/2"	15	40	20	80	
060106	3/4"	20	25	14	56	
060108	1"	25	25	10	40	
060110	1.1/4"	32	20	4	16	
060112	1.1/2"	40	20	3	12	
060116	2"	50	20	2	8	

602
Female/female, "T" handle
 Внутренняя/внутренняя резьба, «бабочка»


КОД COD.	РАЗМ. MISURA/SIZE	ДУ DN	НД PN	КОРОБ. BOX	КАРТ.ЯЩИК CART.	€
060204	1/2"	15	40	24	96	
060206	3/4"	20	25	20	80	
060208	1"	25	25	10	40	
060210	1.1/4"	32	20	6	24	

605
Male/female, aluminium handle
 Наружная/внутренняя резьба, алюминиевый рычаг


ACS

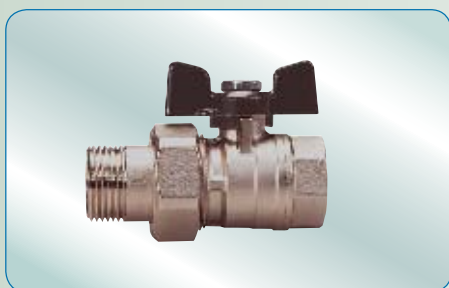
КОД COD.	РАЗМ. MISURA/SIZE	ДУ DN	НД PN	КОРОБ. BOX	КАРТ.ЯЩИК CART.	€
060504	1/2"	15	40	24	96	
060506	3/4"	20	25	14	56	
060508	1"	25	25	8	32	
060510	1.1/4"	32	20	4	16	
060512	1.1/2"	40	20	3	12	
060516	2"	50	20	2	8	

606
Male/female, steel handle
Наружная/внутренняя резьба, стальной рычаг


КОД COD.	РАЗМ. MISURA/SIZE	ДУ DN	НД PN	КОРОБ. BOX	КАРТ.ЯЩИК CART.	€
060604	1/2"	15	40	20	80	
060606	3/4"	20	25	14	56	
060608	1"	25	25	8	32	
060610	1.1/4"	32	20	4	16	
060612	1.1/2"	40	20	3	12	
060616	2"	50	20	2	8	

607
Male/female, "T" handle
Наружная/внутренняя резьба, «бабочка»


КОД COD.	РАЗМ. MISURA/SIZE	ДУ DN	НД PN	КОРОБ. BOX	КАРТ.ЯЩИК CART.	€
060704	1/2"	15	40	24	96	
060706	3/4"	20	25	20	80	
060708	1"	25	25	10	40	
060710	1.1/4"	32	20	4	16	

626
Female/manifold fittings, "T" handle
Внутренняя/разъемный соединитель, бабочка


КОД COD.	РАЗМ. MISURA/SIZE	ДУ DN	НД PN	КОРОБ. BOX	КАРТ.ЯЩИК CART.	€
062604	1/2"	15	40	20	80	
062606	3/4"	20	25	14	56	
062608	1"	25	25	10	40	

604
Female/female, with lockable square cap
Внутренняя/внутренняя резьба, колпак под пломбировку


КОД COD.	РАЗМ. MISURA/SIZE	ДУ DN	НД PN	КОРОБ. BOX	КАРТ.ЯЩИК CART.	€
060404	1/2"	15	40	20	80	
060406	3/4"	20	25	14	56	
060408	1"	25	25	10	40	
060410	1.1/4"	32	20	4	16	
060412	1.1/2"	40	20	3	12	
060416	2"	50	20	2	8	

609

Male/female, with lockable square cap
 Наружная/внутренняя резьба, колпак под пломбировку



КОД COD.	РАЗМ. MISURA/SIZE	ДУ DN	НД PN	КОРОБ. BOX	КАРТ.ЯЩИК CART.	€
060904	1/2"	15	40	20	80	
060906	3/4"	20	25	14	56	
060908	1"	25	25	10	40	
060910	1.1/4"	32	20	4	16	
060912	1.1/2"	40	20	3	12	
060916	2"	50	20	2	8	

650

Handle extension for thermal isolation *Удлинитель ручки *



КОД COD.	РАЗМ. MISURA/SIZE	ДУ	НД	КОРОБ. BOX	КАРТ.ЯЩИК CART.	€
065004	1/2"-3/4"			30	120	
065008	1"			15	60	
055008	1.1/4"-1.1/2"			10	40	
055012	2"			10	40	

* Adattabile solo per leva/farfalla alluminio - Подходит только для алюминиевого рычага